


ECR97 JACKET LATCH/CLIP KIT INSTRUCTIONS

ECR97 - 075/100 Kit #550002229

WARNING

Kit shall be installed by qualified service agency in accordance with manufacturer's instructions and all applicable codes and requirements of authority having jurisdiction. If information in these instructions is not followed exactly, a fire, explosion or production of carbon monoxide may result causing property damage, personal injury or loss of life. Qualified service agency is responsible for proper installation of this kit. Installation is not proper and complete until operation of appliance is checked as specified in manufacturer's instructions supplied with the kit.


Figure 1 - Latch Clip on Jacket

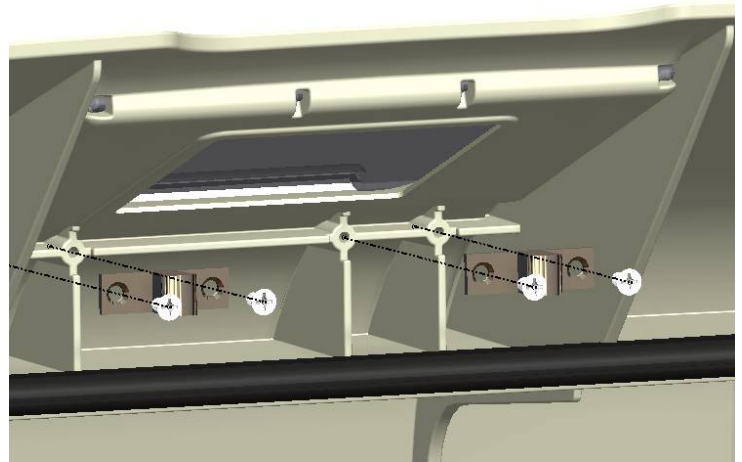

Jacket Latch/Clip Replacement Kit

1. Tools required:
 - Philips screwdriver
2. Follow instructions To Turn Off Gas to Appliance.
3. Remove jacket from boiler. Grasp front cover at lip behind plastic smoke-colored control cover. Pull forward to release snap action latches. Lift jacket up and off bottom jacket rest.
4. Remove latch clip from jacket. Remove ball catch from user interface bracket.
5. Attach new latches with screws provided. See Figures 1 & 2.
6. Adjust latch resistance, as necessary. Turn screw clockwise to increase resistance, counter clockwise to reduce resistance. See Figure 2.
7. Follow Operating Instructions to return boiler to operation.
8. Install jacket.

Figure 2 - Ball Catch on User Interface Bracket

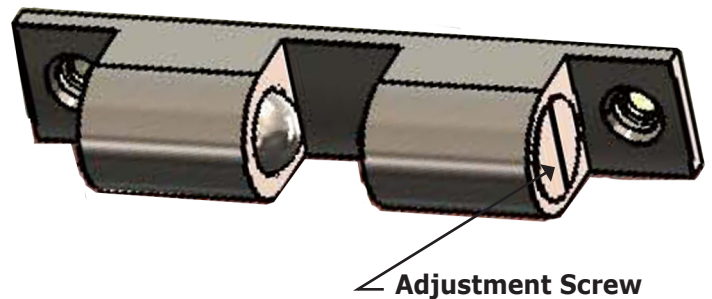

PARTS LIST

ECR97 Jacket Latch/Clip Kit #550002229		
DESCRIPTION	PART #	QTY
Jacket Latch Screws	-	8
Jacket Latch - Door	-	2
Instructions	240008657	1

ISO 9001-2008 Certified Company
ECR International, Inc.
2201 Dwyer Ave.
Utica, NY 13501



Check our website frequently for updates: www.ecrinternational.com