

ECR97 JACKET GASKET KIT


INSTRUCTIONS

ECR97 - 075/100 Kit #550002230

⚠ WARNING

Kit shall be installed by qualified service agency in accordance with manufacturer's instructions and all applicable codes and requirements of authority having jurisdiction. If information in these instructions is not followed exactly, a fire, explosion or production of carbon monoxide may result causing property damage, personal injury or loss of life. Qualified service agency is responsible for proper installation of this kit. Installation is not proper and complete until operation of appliance is checked as specified in manufacturer's instructions supplied with the kit.

Figure - 1 Jacket and Gasket

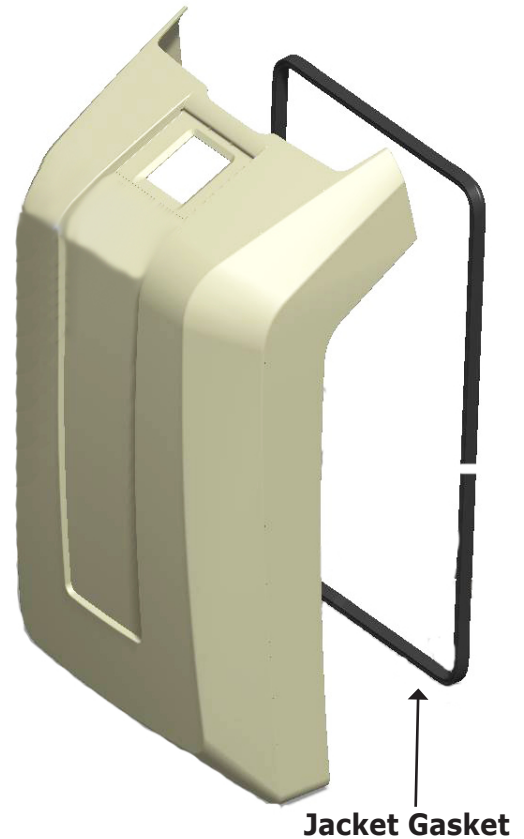

Jacket Gasket Replacement Kit

1. Tools required:
 - Medium diagonal wire cutter
2. Follow instructions To Turn Off Gas To Appliance.
3. Remove jacket from boiler. Grasp front cover at lip behind plastic smoke-colored control cover. Pull forward to release snap action latches. Lift jacket up and off bottom jacket support.
4. At separation in gasket, grasp gasket end, pull around until gasket is completely removed from jacket.
5. Start at mid-point on jacket side and press gasket onto jacket lip working around jacket.
6. Gasket ends should meet with no gap. Trim extra material with wire cutters.
7. Follow Operating Instructions to return to operation.

PARTS LIST

ECR97 Jacket Gasket Kit #550002230		
DESCRIPTION	PART #	QTY
Jacket Gasket	-	8.5 ft
Instructions	240008658	1

ISO 9001-2008 Certified Company
 ECR International, Inc.
 2201 Dwyer Ave.
 Utica, NY 13501



Check our website frequently for updates: www.ecrinternational.com