


Engineer: \_\_\_\_\_

Project Name: \_\_\_\_\_

Project Location: \_\_\_\_\_

Contractor: \_\_\_\_\_



#### APPLICATION:

Gas fired hot water heating boiler for indoor installations. Approved for closet or alcove installations. For use with natural or liquefied petroleum gases (LP/propane) LP conversion kit provided with the boiler. Wall mounted, optional floor mount kit available. Constructed and hydro-statically tested for maximum allowable working pressure of 150 PSIG (pounds per square inch gauge) in accordance with ASME boiler and pressure vessel code, section IV, rules for construction of heating boilers.

#### BOILERS INCLUDE:


- Wall Mount Bracket
- Boiler Control Module
  - ▶ Line voltage/intermittent direct spark ignition. Replaceable fuse /extra spare fuse shipped with the control.
  - ▶ Controlling premix modulating gas valve and blower.
  - ▶ User interface with LCD screen display English text—boiler status indication.
  - ▶ Function Programming Keys - Reset, Menu, Enter and arrow s (+ - ).
  - ▶ Central Heating CH and Domestic Hot Water DHW setpoints. Domestic hot water priority with programmable maximum priority time.
  - ▶ Outdoor air sensor. Programmable reset curves and warm weather shutdown or fixed water temperature operation.
  - ▶ Boost function temperature setting and adjustable boost time .
  - ▶ Integral multiple boiler control capability up to 16 boilers. Requires an optional system sensor
  - ▶ Service reminder status.
- Boiler Combustion System
  - ▶ Premix Gas valve and blower assembly with 20-100% modulating firing rate. Turn down ratio (5:1) gas input.
  - ▶ Stainless Steel Fiber Mesh Burner
  - ▶ Flame Sensor

- Heat Exchanger Assembly
  - ▶ Vertically mounted single piece helical fin tube coil. Manufactured out of 316L stainless steel tubing with 444 stainless steel fins welded onto the coil with a laser automated process. ASME stamped with a 150 psi maximum allowable working pressure. A 30psi safety relief valve is standard.
  - ▶ Non-metallic flue gas collector.
- Electrical
  - ▶ User Interface relocation capable.
  - ▶ Line voltage junction box with DHW Pump and CH Pump connections.
  - ▶ Low voltage terminal strip.

OPTIONAL EQUIPMENT:

- Floor mounting stand
- Multiple boiler system sensor




|  <b>Models &amp; Capacities</b> |  |         |   |  |                     |
|--|--|---------|---|--|---------------------|
| Size   | Boiler Input Rate (MBH) <sup>(1)</sup> |         | Heating Capacity (MBH)<br><sub>(1)(2)</sub> | Net AHRI Rating, Water (MBH) <sup>(1)(3)</sup> | AFUE <sup>(2)</sup> |
|  | Maximum                                | Minimum |   |  |                     |
| <b>OLSSV-050</b>   | 50                                     | 10      | 46  | 40   | 95.0                |
| <b>OLSSV-075</b>   | 75                                     | 15      | 69  | 60   | 95.0                |
| <b>OLSSV-100</b>   | 100                                    | 20      | 91  | 79   | 95.0                |
| <b>OLSSV-150</b>   | 150                                    | 30      | 139   | 121  | 95.0                |
| <b>OLSSV-200</b>   | 200                                    | 40      | 185   | 161  | 95.0                |

\* SSV Models are ENERGY STAR rated products.  
<sup>(1)</sup> 1000 Btu/hr (British Thermal Units Per Hour)  
<sup>(2)</sup> Heating Capacity and AFUE (Annual Fuel Utilization Efficiency) are based on DOE (Department of Energy) test procedures.  
<sup>(3)</sup> Net AHRI Ratings based on piping and pickup allowance of 1.15. Contact Technical Support before selecting boiler for installations having unusual piping and pickup requirements, such as intermittent system operation, extensive piping systems, etc.

## Physical Data



| Models   |              | 050/075/100        | 150/200          |
|--|--------------|--------------------|------------------|
| Width (A)  |              | 20" (508mm)        | 23" (584mm)      |
| Height - Unit only (B)                             |              | 27.75" (705mm)     | 37.75" (959mm)   |
| Depth (C)  |              | 14.75" (375mm)     | 16.3" (414mm)    |
| Bracket (D)  |              | 24.41" (620mm)     | 35.6" (904mm)    |
| Height unit w/ Piping (E)                          |              | 30.75" (781mm)     | 40.75" (104cm)   |
| Height unit w/vent (L)                             |              | 31" (787mm)        | 41.8" (106cm)    |
| Height unit from vent w/piping supply & return (M) |              | 33.94" (862mm)     | 44.75" (114cm)   |
| Water Connections                                  | Size (F)     | 3/4" Type L Copper | 1" Type L Copper |
|  | Location (G) | 2.22" (56.4mm)     | 2" (51mm)        |
|  | Location (H) | 2.33" (59mm)       | 3" (76mm)        |
|  | Location (I) | 9.32" (237mm)      | 11" (279mm)      |
| Gas Connection                                     | Location (J) | 3.06" (77.7mm)     | 4.6" (117mm)     |
|  | Size (K)     | 1/2" NPT           | 3/4" NPT         |
| Condensate Drain Connection (I)                    |              | 3/4" NPT           | 3/4" NPT         |
| Weight   | Shipping     | 135 lb (61 kg)     | ~200 lb (91kg)   |
|  | Unit         | 75 lb (34kg)       | ~127 lb (58kg)   |
| Vent Connector                                     |              | 2" (51mm)          | 3" (76mm)        |

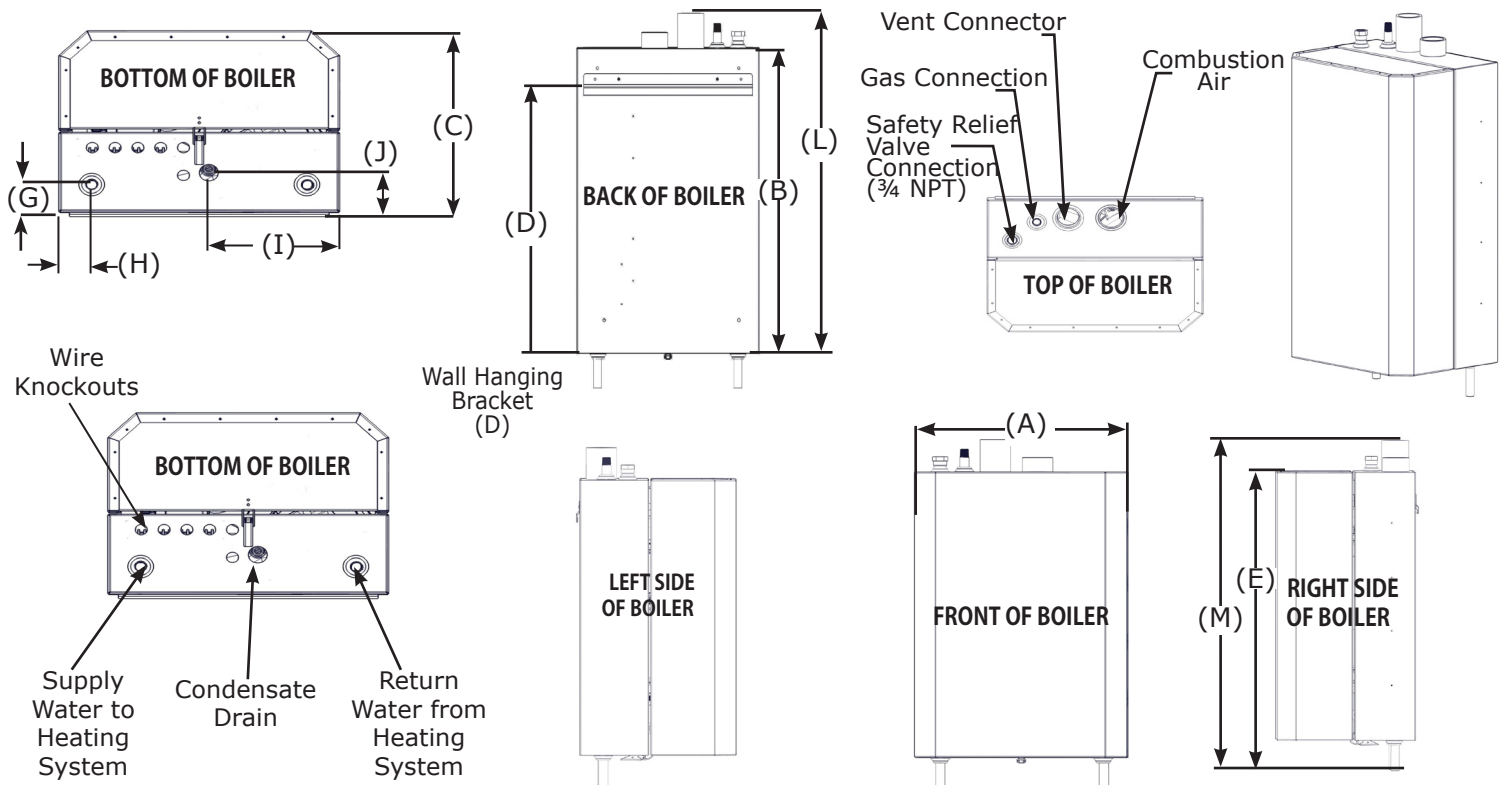

### CLEARANCES

| Dimension                         | Combustible Materials <sup>(1)</sup> | Service <sup>(1)(2)</sup>  |
|-----------------------------------|--------------------------------------|----------------------------|
| <b>Model</b>                      | <b>050/075/100/150/200</b>           | <b>050/075/100/150/200</b> |
| <b>Top (A)</b>                    | 0" (0 cm)                            | 14" (36 cm)                |
| <b>Left Side (B)</b>              | 0" (0 cm)                            | 0" (0 cm)                  |
| <b>Right Side (C)</b>             | 0" (0 cm)                            | 0" (0 cm)                  |
| <b>Front (D)</b>                  | 0" (0 cm)                            | 6" (16 cm)                 |
| <b>Back (E)</b>                   | 0" (0 cm)                            | 0" (0 cm)                  |
| <b>Bottom (F)</b>                 | 0" (0 cm)                            | 12" (32 cm)                |
| <b>Combustion Air/Vent Piping</b> | 0" (0 cm)                            | 6" (16 cm)                 |
| <b>Hot Water Piping</b>           | See local code                       | 6" (16 cm)                 |

<sup>(1)</sup> Required distances measured from boiler jacket.  
<sup>(2)</sup> Service, proper operation clearance recommendation.

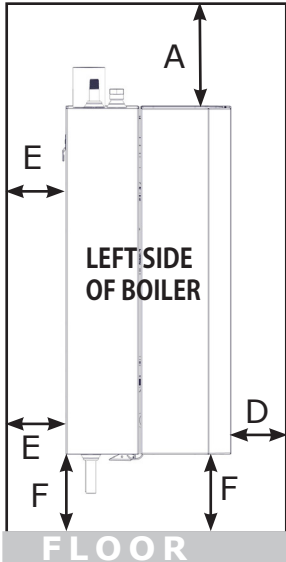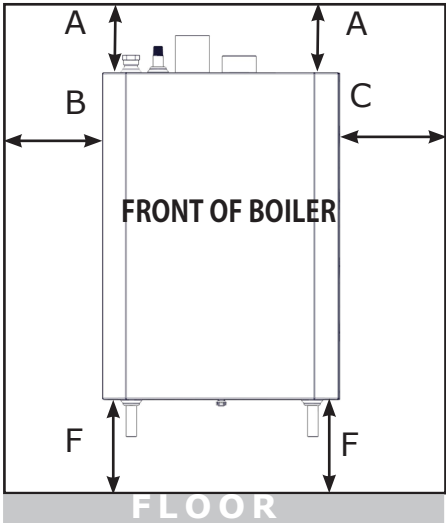

### VENTING

| Flue Gas Location | Combustion Air Location | Flue Gas Terminals |
|-------------------|-------------------------|--------------------|
| Roof              | Roof                    | Two Pipe           |
|                   |                         | Concentric         |
|                   | Side Wall               | Single Pipe        |
|                   | Inside Air              | Single Pipe        |
| Side Wall         | Roof                    | Single Pipe        |
|                   | Side Wall               | Two Pipe           |
|                   |                         | Concentric         |
|                   | Inside Air              | Single Pipe        |

| Minimum/Maximum Vent Lengths |                  |                    |                     |                     |
|------------------------------|------------------|--------------------|---------------------|---------------------|
|                              | 2" Pipe          |                    | 3" Pipe             |                     |
| Model                        | 050              | 075/100            | 075/100             | 150/200             |
| Minimum                      | 6 ft.<br>(1.8 m) | 6 ft.<br>(1.8 m)   | 6 ft.<br>(1.8 m)    | 6 ft.<br>(1.8 m)    |
| Maximum                      | 100 ft. (30.5 m) | 50 ft.<br>(15.2 m) | 100 ft.<br>(30.5 m) | 100 ft.<br>(30.5 m) |

| Equivalent Length of Venting Components |       |        |
|---|-------|--------|
| Component                               | Feet  | Meters |
| 90° Elbow                               | 5     | 1.6    |
| 45° Elbow                               | 3 ½   | 1.1    |
| 2" x 4" Adapter                         | 0     | 0      |
| 3" x 4" Adapter                         | 0     | 0      |
| Concentric Vent Kit                     | 5     | 1.6    |
| Polypropylene Flexible Pipe per Foot    | 2 5/8 | 0.8    |

Note: Allowable Venting Materials - Polypropylene, PVC, CPVC and ABS. Tables shown are for vent systems utilizing PVC. Refer to IOM and vent pipe manufacturer's instructions for equivalent vent lengths and additional information.

