

VENT CLAMP KIT INSTRUCTIONS
550003452 For 80mm Natalini Vent Piping
& 550003453 For 110mm Natalini Vent Piping

Kit installation shall be completed by qualified agency.

⚠ WARNING

Asphyxiation hazard. Improper installation could result in death or serious injury. Read these instructions and understand all requirements, including requirements of authority having jurisdiction, before beginning installation. Installation not complete until appliance operation is verified per Installation, Operation & Maintenance Manual provided with boiler.

⚠ CAUTION

Laceration, burn hazard. Metal edges and parts may have sharp edges and/or may be hot. Use appropriate personal protection equipment to include safety glasses and gloves when installing or servicing this appliance. Failure to follow these instructions could result in minor or moderate injury.

Installation Instructions:

1. Follow instructions To TURN OFF GAS TO APPLIANCE found on Operating Instructions label on boiler or in Installation, Operation & Maintenance Manual. Verify all electrical power to boiler is turned off.

⚠ WARNING

Electrical shock hazard. Turn OFF electrical power supply at service panel.

2. Place clamp so etched "UP" is facing up.
3. Open clamp slightly by separating circular areas from each other.
4. Slide male end of first pipe through open clamp so the shoulder of the female end of the pipe stops the clamp from sliding off the pipe.
5. Insert the male end of the second pipe into the clamp on the "up" etched side. Force the two pipes together.
6. Verify the two pipes are secure together with clamp in place.
7. Turn gas and power on to the boiler.
8. Resume operation using OPERATING INSTRUCTIONS found on Operating Instructions label on boiler or in Installation, Operation & Maintenance Manual.
9. Verify proper operation.

Figure 1 - Clip for Natalini Vent Piping

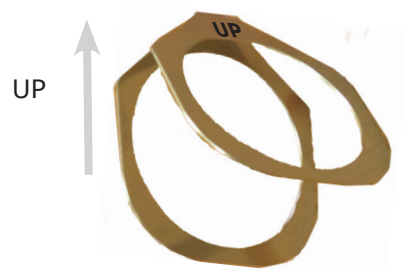


Figure 2 - Clip for Natalini Vent Piping

