

## Trade Price Book - 815

Effective 8/24/15

# Olsen | Airco

## Heating & Cooling Products



Oil-Fired Furnaces

**Customer Service  
Technical Support**  
Phone: 800-325-5479  
Fax: 315-724-9319/866-432-7329  
[www.olsenhvac.com](http://www.olsenhvac.com)

**Corporate Sales**  
Phone: 877-386-5475  
Fax: 716-366-4670

**Literature**  
[literature@ecrinternational.com](mailto:literature@ecrinternational.com)



A Family of Heating & Cooling Brands.

P/N 240005041 815 Rev. A

**TABLE OF CONTENTS**

<b>Terms &amp; RMA Policy</b>	<b>3-4</b>
<b>Multiposition Oil Furnaces</b>	
UML/UMLV	<b>5-6</b>
WML/WMLV/MPL	<b>7-9</b>
<b>Lowboy Oil Furnaces</b>	
BCL/BCL-S/BFL	<b>10-12</b>
BML/BMLV	<b>13-14</b>
<b>Highboy Oil Furnaces</b>	
HML/HMLV	<b>15-16</b>
HTL/HTLV	<b>17-18</b>
<b>Air Conditioning</b>	
GSX Condenser	<b>19</b>
CC & CE Cooling Coils	<b>20</b>

**TERMS & CONDITIONS OF SALE - GENERAL TERMS**

**PRICES & SPECIFICATIONS:** All pricing and specifications subject to change without notice. The prices herein supersede all prior quotations.

**PAYMENT TERMS:** Net 30 Days

**ORDERS:** Orders will be accepted on the basis of prices in effect at the time the order is received. No order or contract will become an obligation on our part until accepted by the General Sales Department. ECR International shall not be liable for any delay or failure in the delivery or shipment of goods due to any cause or causes beyond its control.

**TAXES:** Add to the prices and terms quoted any manufacturers' or sales tax payable on the transaction under any effective statute.

**SHIPMENT**

**TRUCK LOADS:** \$40,000 Net Order Value - Freight Prepaid. Indirect Water Heaters and Commercial Boiler lines can be added to any residential order for freight purposes.

Authorized Distributors can combine Argo, Airco, Dunkirk, EMI, Olsen, Pennco and Utica and on one purchase order to earn free freight.

Stop off charges of \$150 will apply to stop off locations within 100 miles of final destination. Please call for pricing for stop off special handling for a location further than 100 miles or for special handling pricing for services such as lift gate, unloading assistance, etc.

**LESS THAN TRUCKLOAD SHIPMENT: F.O.B. ECR INTERNATIONAL - FACTORY OR WAREHOUSE**

**ORDER INFORMATION CHECKLIST**

The following information must be included on equipment or parts orders to insure proper shipment & invoicing:

- 1) Purchase Order Number
- 2) Bill To Address
- 3) Ship To Address
- 4) Method of Shipment (i.e. - trailer load, UPS, etc.)
- 5) Requested Ship Date
- 6) Special Instructions (i.e. - "Carrier to call...")
- 7) Pricing
- 8) Product Description (i.e. - Model, Size, Series, etc.)
- 9) Fuel Characteristics (i.e. Oil, Natural Gas, Propane)
- 10) Electrical Characteristics (i.e. - Operating Voltage, Cycles, Phases, etc.)
- 11) Non-Standard Equipment (Indicate "Optional" when substituted for standard equipment at extra cost listed. Indicate "Additional" when added to standard equipment).
- 12) Kits or Parts (Orders for kits or parts must indicate equipment size and series).
- 13) Send orders to:

**E-Mail: [ecrorderentry@ecrinternational.com](mailto:ecrorderentry@ecrinternational.com)  
Fax: 315-724-9319**

- 14) Please note the following Remit To Address:

**ECR International, Inc.  
P.O. Box 8000 Department 039  
Buffalo, NY 14267**

Continued on Next Page

**TERMS & CONDITIONS OF SALE - GENERAL TERMS CONTINUED**  
**U.S. DISTRIBUTOR - RETURN MATERIAL POLICY - EFFECTIVE 8/18/2014**

To assist in providing the best service to our valued customers, ECR International has developed the following guidelines to help you in the unlikely event that you will need to return merchandise purchased from us. These guidelines have been developed after carefully reviewing common industry practice. We trust that you find them fair and easy to follow.

**Prior Approval Required** - All returns for exchange, credit, repair service or warranty claim must be approved by ECR and require an RMA number prior to return of the material. A request must be completed via ECR International's online web portal. Please log on to [www.ecrcustomerportal.com](http://www.ecrcustomerportal.com) (hyperlink below) to complete your request for return. If you do not already have access to the customer web portal please contact ECR Customer Service at 1-800-325-5479 to be set-up.

**Eligibility** - An RMA Request must be received within 60 days from the date of invoice for returns of New & Unused product in original packaging. A restocking fee of 15% will be charged for all new and unused returns that are approved for return. Special Order Products (items not offered as standard in ECR trade price book) are not eligible for return as new and unused product. Request for Warranty Returns must be made within the period covered by the warranty and must fall under the terms and conditions specified in the warranty.

**Repair Service** - Request for repair or rework of product damaged by customer is classified as Repair Service. Repair Service is billed at \$75.00 per hour for labor and net price for parts used in repair/rework. ECR's Return Material (RM) department will evaluate the items returned for repair service. The customer will receive an estimate for the dollar amount, determined by ECR's RM department, required to complete the repairs requested. A Purchase Order (PO) from the customer for that amount will be required before any work is performed.

**RMA Expiration** - Once the RMA number is issued, the product must be returned within 90 days of the RMA date, or the RMA will be canceled. Products approved for return that are received after 90 days from the RMA date will not be accepted.



**Shipping & Packaging** - All returns must have a valid RMA number clearly displayed on the exterior of the package or the package will not be accepted. All returns of new and unused product must be in the original packaging. All returns must be shipped prepaid by the customer unless otherwise directed by ECR as indicated on the RMA Verification. Ship all approved return material to the facility indicated on the approved RMA Request by the date indicated.

**Replacement Product** - If replacement product is desired it must be indicated on the RMA Request. A PO# is required for the replacement shipment and must be indicated on the RMA Request. All replacement products will be invoiced at the time of shipment.

**Application of Credit** - Credit for returned product will be applied to the customer's account (less restocking fees for New and Unused returns) only after confirmation of receipt by ECR and inspection of the product. Issuance of a credit for a partial return of product does not relieve the customer from the obligation to remit payment for the merchandise not returned in accordance with the payment terms referenced on the customer's invoice(s). Customer will have the option to have any product that is denied for credit returned at their expense.

<http://www.ecrcustomerportal.com>

**UML/UMLV SERIES A**  
MULTIPOSITION OIL FURNACES

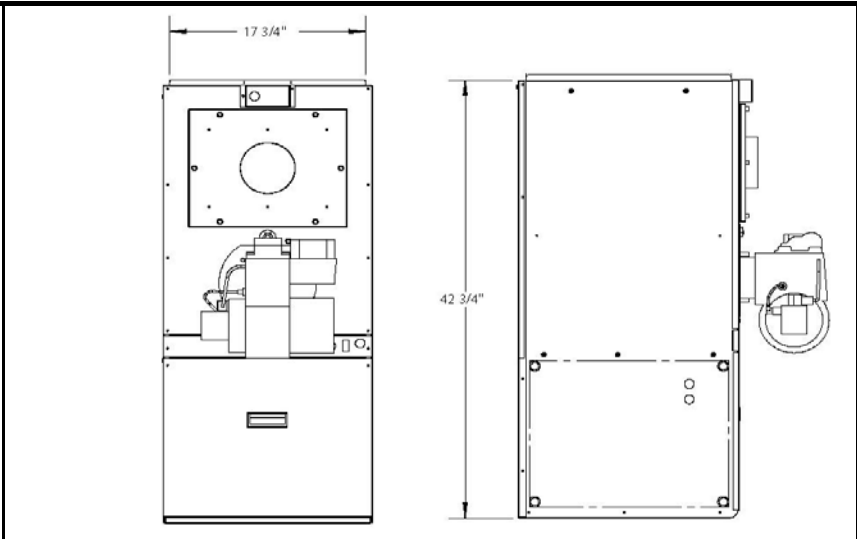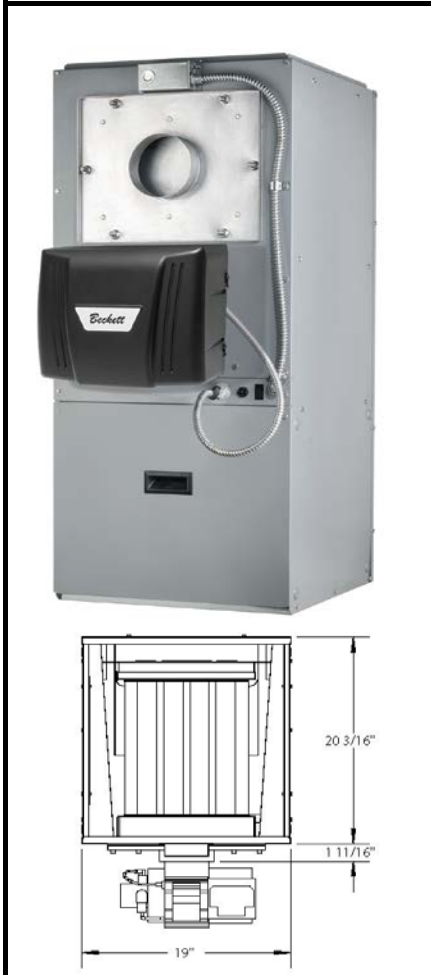

**General Information** (See IOM for complete instructions)

**Clearance to Combustibles**

**UMLA and UMLVA**

Clearances \*24" (610 mm) Service Clearance. \*\*When using combustible floor sub base 550003032 for downflow on combustible floor.

Location	Upflow	Downflow	Horizontal
Top	N/A	N/A	1" (26 mm)
Bottom	0"	0"***	1" (26 mm)
Plenum Top	1" (26 mm)	2" (52 mm)	1" (26 mm)
Horizontal Duct	1" (26 mm)	2" (52 mm)	1" (26 mm)
Rear	1" (26 mm)		
Sides	1" (26 mm)	1" (26 mm)	N/A
Front	18" (458 mm)*		
Flue Pipe	5" (127 mm)		
Enclosure	Closet		

**Electrical** Power requirement for all UML models is: 120 VAC, 1 Ø, 60 Hz., 12A, MCA 10.8 amps, MOP 15.0 amps

**Dimensions**

Model	Cabinet			Plenum Openings	Flue Diam.	Filter (Permanent)
	Width	Length	Height			
	A	B	C	Supply		
UMLA UMLVA	19"	20 3/16"	42 3/4"	17 3/4" W x 18 3/4" D (45.1 cm x 47.6 cm)	5" (12.7 cm)	16" x 20" x 1"
	(48.3 cm)	(51.3 cm)	(108.6 cm)	Return (Side & Bottom)		
	Shp. Wgt. 188 lbs (85.5 Kf.)			14" x 18" (35.6 cm x 45.7 cm)		

UMLA/UMLVA MULTIPOSITION SERIES CONTINUED								
UMLA/UMLVA - MULTIPOSITION - CHIMNEY VENT - FRONT FLUE								
MODEL	SKU	TRADE PRICE	FIR. RATE GPH	INPUT/ OUTPUT MBH	AFUE	BURNER	MOTOR DRIVE	AC RANGE IN TONS (CFM RANGE)
UML80A	UML080210411106	\$2,420	0.65	91/77	87.0%	BECKETT AF	1/2 HP DIRECT	3 Tons (738-1339)
UMLV80A*	UML080210412106	\$2,850					1/2 HP ECM	3 Tons (510-1380)
UML80RF	UML080240411106	\$2,515			86.3%	RIELLO 40F3	1/2 HP DIRECT	3 Tons (738-1339)
UMLV80ARF*	UML080240412106	\$2,945					1/2 HP ECM	3 Tons (510-1380)

\*Indicates an ENERGY STAR rated model.

Four Firing Rates: .55, .65, .75 and .85 gph - Alternative nozzels furnished with furnace.

UMLA/UMLVA - MULTIPOSITION - CHIMNEY VENT - LESS BURNER								
MODEL	SKU	TRADE PRICE	FIR. RATE GPH	INPUT/ OUTPUT MBH	AFUE	MOTOR DRIVE	AC RANGE IN TONS (CFM RANGE)	
UML80ALB	UML080260411106	\$1,675	0.65	91/77	Dependent on Burner Application	1/2 HP DIRECT	3 Tons (738-1339)	
UMLB80ALB	UML080260412106	\$2,105				1/2 HP ECM	3 Tons (510-1380)	

USE FURNACE MULTIPLIER FOR ALL OF THE FOLLOWING	PN	TRADE
<b>Combustible Floor Base</b> (Required for Downlow installations on combustible flooring)	550003032	\$90
<b>Optional Beckett Burner Cover</b>	240010859	\$200
<b>Blocked Vent Safety Switch (Optional for US)</b>	3002237	\$93
<b>Burner In A Box - Beckett</b>	550003079	\$745
<b>Burner in A Box - Riello</b>	550003081	\$840

**HML/HMLV STANDARD EQUIPMENT**

**STANDARD EQUIPMENT:**

Low Profile 42.75" Cabinet - Easily accommodates larger, high efficiency "A" coils in all job sites. Jacket is 22 gauge with 1/2" fiber reinforced foil faced fiberglass insulation. Closet rated for 1" clearances.

Dual-Pass Chamberless Heat Exchanger - 409 stainless steel first pass drum and aluminized steel tube second pass. Stainless steel turbulators in each tube maximizes efficiency. Combination offers low pressure drop and large heat transfer surface ensuring high efficiency. 100% pressure tested.

Fan Limit - A snap disc limit is smartly located to eliminate potential overheating and premature heat exchanger fatigue.

Electronic Fan Timer Control - Located on full rail slide out blower deck for easy access for wiring, adjustment and service. Wiring is color coded, equipped with connections for easy air conditioning, humidifier and air cleaner installation. A terminal strip is also supplied for thermostat connections.

Beckett AFG Oil Burner - Includes factory supplied solenoid valve on pump for cleaner and quieter operation with reduced maintenance. An optional Beckett burner cover is available - item #240010859. Loosen the mounting bolts from the keyhole flange to easily remove/mount the burner. Four Firing rates to serve a wide range of applications. Alternative nozzles furnished with furnace. Optional Riello oil burners also available.

Blower Assembly - Slides out on full rails for easy access and service. PSC 4 speed or ECM variable speed.

Sight Glass and Sample Port - Large sight glass for observing flame and separate sample port for measuring draft overfire.

Washable Filter System - Features filter rack and a washable filter. The filter rack can double as a transition piece if the installer wishes to use a Buffalo Boot instead.

**WML/WMLV SERIES C/MPL SERIES B**  
MULTIPOSITION OIL FURNACES



**WML-C / WMLV-C & MPL-B**  
Down Flow

**WML-C / WMLV-C & MPL-B**  
Horizontal

General Information (See IOM for complete instructions)			
Clearances		Clearance to Combustibles	
		WML/WMLV/MPL	
		Downflow	Horizontal
(1) Required distances measured from furnace.	Top	0"	3"
	Bottom	0"	1"
	S/A Plenum	1"	1"
	Rear	1"	1"
	Sides	1"	1"
	Front	10"	10"
	Flue Pipe	18"	18"
Enclosure		Closet	
*When using factory supplied combustible floor base.			
**24" is required for servicing.			
All models may be installed on combustible floors.			
Electrical		(120 Volts AC, 60 hertz, 1 phase, 12 Amps)	

Dimensions							
Model	Cabinet			Plenum Openings		Flue Diam.	Filter (Permanent)
	Width	Length	Height	Supply	Return		
	A	B	C		Side/Bottom	J	
WML/WMLV	22"	22-1/8"	55-1/4"	19" x 19"	18" x 18"	5"	20" x 20" x 1"
MPL	22-1/4"	22-1/4"	62"	20-1/2" x 20-1/2"	18" x 18"	6"	20" x 20" x 1"

WML/WMLV/MPL MULTIPOSITION SERIES CONTINUED										
WML/WMLV - MULTI- POSITION - FRONT FLUE										
MODEL	SKU	TRADE PRICE	FIR. RATE GPH	INPUT/ OUTPUT MBH	AFUE	VENT	BURNER	MOTOR DRIVE	AC RANGE IN TONS	SHIP WGT. (LBS.)
WML60C2	34306080	\$2,648	0.50	70/59	83.3%	CHIM.	BECKETT AF	1/2 HP DIRECT	2 - 3 TONS (760 - 1500)	265
WML60C2**	34306040	\$2,929						275		
WMLV60C2	34306076	\$3,482						1/2 HP ECM		265
WMLV60C2**	34306046	\$3,759						275		
WML80CNX2	34308085	\$2,706	0.65	91/77	85.5%	CHIM.	BECKETT NX	1/2 HP DIRECT		265
WMLV80CNX2	34308090	\$3,540						1/2 HP ECM		265
WML80CRF2	34308073	\$3,080	0.65	91/76	83.3%	CHIM.	RIELLO 40F3	1/2 HP DIRECT		265
WMLV80CRF2	34308078	\$3,839						1/2 HP ECM		265
WML80CB2U2	34308072C	\$3,782	0.65	91/75	83.6%	DIR.*	BECKETT AFII-85	1/2 HP DIRECT		265
WMLV80CB2U2	34308077C	\$4,493						1/2 HP ECM		265
WML80CRBU2	34308074C	\$4,051	0.65	91/78	86.1%	DIR.*	RIELLO 40BF3	1/2 HP DIRECT	265	
WMLV80CRBU2	34308079C	\$4,840						1/2 HP ECM	265	

\* Direct Vent units require the use of Olsen/Airco specific Vent Kit and Termination.


\*\* With Vestibule

MPL - MULTI- POSITION - FRONT FLUE										
MODEL	SKU	TRADE PRICE	FIR. RATE GPH	INPUT/ OUTPUT MBH	AFUE	VENT	BURNER	PSC MOTOR DRIVE	AC RANGE IN TONS	SHIP WGT. (LBS.)
MPL120B2	34312070	\$2,957	1.00	140/118	83.3%	CHIM.	BECKETT AF	3/4 HP DIRECT	2 TO 3 TONS (1185 - 1331)	320
MPL120BRF2	34312073	\$3,457		140/117	83.8%	CHIM.	RIELLO 40F5			320
MPL120BB2U2	34312072C	\$3,890		140/118	84.8%	DIR.*	BECKETT AFII-150			323




WML/WMLV/MPL MULTIPOSITION SERIES CONTINUED		
* Direct Vent units require the use of Olsen/Airco specific Vent Kit and Termination.		
USE FURNACE MULTIPLIER FOR ALL OF THE FOLLOWING	PN	TRADE
WML C Downflow Floor Base	6000075	\$105.00
WML-C Vestibule Kit (Non-Vested Unit)	30554	\$406.00
Conversion Kit to WML90	3600069	\$44.00
Low Fire Kit (.50GPH) WML	29880	\$62.00
<b>Kit #40LKT310 WML</b> 10' x 3" Flex Vent, Terminal Adaptor & Sealant (Z-Flex)	240006906	\$412.00
<b>Kit #40LKT315 WML</b> 15' X 3" Flex Vent, Terminal Adaptor & Sealant (Z-Flex)	240006907	\$537.00
<b>Kit #40LKT320 WML</b> 20' X 3" Flex Vent, Terminal Adaptor & Sealant (Z-Flex)	240006908	\$673.00
<b>MPL-B Downflow Floor Base</b>	6000073	\$166.00
<b>Kit #40LKT410 MPL</b> 10' X 4" Flex Vent, Terminal Adaptor & Sealant (Z-Flex)	240006909	\$450.00
<b>Kit #40LKT415 MPL</b> 15' X 4" Flex Vent, Terminal Adaptor & Sealant (Z-Flex)	240006910	\$594.00
<b>Kit #40LKT420 MPL</b> 20' X 4" Flex Vent, Terminal Adaptor & Sealant (Z-Flex)	240006911	\$737.00
WML/WMLV/MPL STANDARD EQUIPMENT		
<p><b>STANDARD EQUIPMENT:</b> Heat Exchanger – Proven heat exchanger design featuring 100% welded construction for maximum performance. Large accessible clean out ports.                      Radiator – “Wrap-around” style for maximum heat transfer.                      Cabinet construction – 22 gauge steel cabinet ensures strength and quiet operation. WML/WMLV models maybe factory equipped with vestibule compartment to enclose burner and controls. Vestibule compartment for WML/WMLV also available as an aftermarket kit for non factory equipped units.                      Insulation – Spun glass and aluminum foil for “hand-cool” cabinet.                      Burner – Equipped with industry leading Beckett or Riello oil burners which include oil solenoid valve, PSC motor and solid state controls. Factory assembled, wired and tested. Ready to connect to fuel line.                      Barometric Draft Control – Included with all chimney vent models.                      Blower – Direct drive type. Permanently lubricated, resilient mounted.                      PSC Blower Motor (WML/MPL Models) – Designed for heavy duty continuous operation. Thermally protected. Four-speed is standard with ½ HP (WML) and ¾ HP (MPL) direct drive models.                      ECM Variable Speed Blower Motor (WMLV Models) – Maximizes air conditioner efficiencies, reduces electrical operating costs and enhances comfort with programmed ramp up and ramp down operation. Available on ½ HP direct drive models.                      Blower Assembly – Full length slide out blower tray allows entire blower assembly to be easily removed for servicing.                      Controls – (UTEK) Electronic fan timer control is standard on all models.                      Air conditioning – Fan timer control is AC ready.                      Filter Racks and Washable Air Filters – Included with all models.                      Alternate firing rates available for a wide variety of applications (alternate nozzles are field supplied).                      Direct Vent Models – Include Beckett AFII-85 (WML/WMLV) or Beckett AFII-150 (MPL) or Riello 40BF3 (WML) oil burner with pressure switch system for proving airflow, intake air collar and vent adapter. Vent pipe kits sold separately.</p>		







**BCL - REAR BREECH**

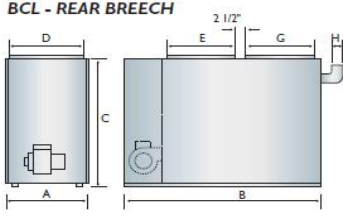

**BFL - FRONT BREECH**

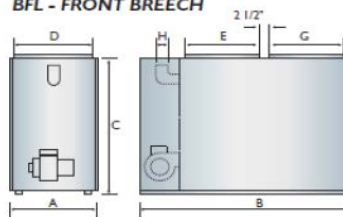

**BCL 190/225 REAR BREECH**

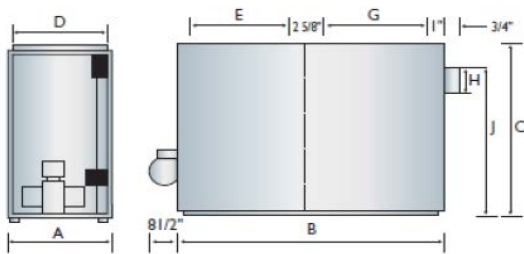

**General Information** (See IOM for complete instructions)

Clearances		Clearance to Combustibles	
		BCL-S & BFL	BCL High Cap.
(1) Required distances measured from furnace.	<b>Top</b>	1"	3"
	<b>Bottom</b>	0"	0"
	<b>S/A Plenum</b>	1"	3"
	<b>Rear</b>	6"*	24"
	<b>Side 1</b>	6"*	6"***
	<b>Side 2</b>	24"	18"
	<b>Front</b>	24"	24"
	<b>Flue Pipe</b>	18"	18"
	<b>Enclosure</b>	Standard	Standard

\*24" Required Service Clearance

\*\*Required on one side only for service to rear.

All models may be installed on combustible floors.

Electrical (120 Volts AC, 60 hertz, 1 phase)	Factory Equipped Blower	Amps
	1/3 and 1/2 HP	12
	3/4 HP Belt Drive and 1 HP Direct Drive	15
	1 HP Belt Drive	20

**Dimensions**

Model	Cabinet			Plenum Openings		Flue		Filter (Permanent)
	Width	Length	Height	Supply/Return		Diameter	Height	
	A	B	C	D X E(Supply)/F x G (Return)		H	J	
BCL-S	22"	51-1/2"	41"	20-1/2" x 18-5/8"		6"	37-1/4"	20" x 25" x 1"
BFL	22"	51-1/2"	41"	20-1/2" x 18-5/8"		6"	38-1/4"	20" x 25" x 1"
BCL High Capacity	26"	49"	56"	24" x 22"		7"	47"	20" x 25" x 1" (2)

<b>BCL/BCL-S/BFL LOWBOY SERIES CONTINUED</b>										
<b>BCL - LOWBOY - REAR FLUE</b>										
<b>MODEL</b>	<b>SKU</b>	<b>TRADE PRICE</b>	<b>FIR. RATE GPH</b>	<b>INPUT/ OUTPUT MBH</b>	<b>AFUE</b>	<b>VENT</b>	<b>BURNER</b>	<b>PSC MOTOR DRIVE</b>	<b>AC RANGE IN TONS</b>	<b>SHIP WGT. (LBS.)</b>
BCL120S2	32312062	\$2,655	1.00	140/118	84.4%	CHIM.	BECKETT AF	1/3 HP BELT	N/A	290
BCL120S2	32312009	\$2,546						1/2 HP DIRECT	3 - 4 TONS (1000-1600)	
BCL120ST2	32312005	\$3,006						1 HP DIRECT	3 - 5 TONS (1300-2000)	
BCL145S2	32314563	\$3,206	1.20	168/141	84.0%	CHIM.	BECKETT AF	1/2 HP BELT	3 - 4 TONS (1000-1600)	290
BCL145S2	32314509	\$3,092						1/2 HP DIRECT		
BCL145ST2	32314505	\$3,769						1 HP DIRECT	3 - 5 TONS (1300-2000)	
BCL190	32319070	\$5,416	1.65	231/194	83.7% T	CHIM.	BECKETT AF	3/4 HP BELT	3 - 4 TONS (1300-1550)	530
BCL 190/225	32319072	\$5,752						1 HP BELT	3 - 5 TONS (1600-2200)	540
BCL100SRF2	32310017	\$3,323	0.85	119/102	86.2%	CHIM.	RIELLO 40F3	1/2 HP DIRECT	3 - 4 TONS (1000-1600)	280
BCL100SB2U2	32310013C	\$3,405			86.0%	DIR.*	BECKETT AFII-150	1/2 HP DIRECT		290
<b>T=Thermal Efficiency</b>										
<b>* Direct Vent units require the use of Olsen/Airco specific Vent Kit and Termination.</b>										
<b>BFL - LOWBOY - FRONT FLUE</b>										
<b>MODEL</b>	<b>SKU</b>	<b>TRADE PRICE</b>	<b>FIR. RATE GPH</b>	<b>INPUT/ OUTPUT MBH</b>	<b>AFUE</b>	<b>VENT</b>	<b>BURNER</b>	<b>MOTOR DRIVE</b>	<b>AC RANGE IN TONS</b>	<b>SHIP WGT. (LBS.)</b>
BFL120-2	32312045	\$2,678	1.00	140/114	83.0%	CHIM.	BECKETT AF	1/3 HP BELT	N/A	280
BFL120-2	32312001	\$2,574						1/2 HP DIRECT	3 - 4 TONS (1000- 1600)	
BFL120T2	32312006	\$3,031						1 HP DIRECT	3 - 5 TONS (1300-2000)	290
BFL145NX2	32314547	\$3,335	1.20	168/137	83.1	CHIM.	BECKETT NX	1/2 HP BELT	3 - 4 TONS (1000-1600)	280
BFL145NX2	32314544	\$3,189						1/2 HP DIRECT		
BFL145TNX2	32314507	\$3,646						1 HP DIRECT	3 - 5 TONS (1300-2000)	
BFL100RF2	32310023	\$3,216	0.85	119/102	85.3%	CHIM.	RIELLO 40F3	1/2 HP DIRECT	3 - 4 TONS (1000-1600)	280
BFL100B2U2	32310015C	\$3,611		119/101	85.4%	DIR.*	BECKETT AFII-150	1/2 HP DIRECT		
<b>T=Thermal Efficiency</b>										
<b>* Direct Vent units require the use of Olsen/Airco specific Vent Kit and Termination.</b>										

<b>BCL/BCL-S/BFL LOWBOY SERIES CONTINUED</b>		
<b>USE FURNACE MULTIPLIER FOR ALL OF THE FOLLOWING</b>	<b>PN</b>	<b>TRADE</b>
<b>Kit #40LKT410 BCL/BFL</b> 10' X 4" Flex Vent, Terminal Adaptor & Sealant (Z-Flex)	<b>240006909</b>	<b>\$450</b>
<b>Kit #40LKT415 BCL/BFL</b> 15' X 4" Flex Vent, Terminal Adaptor & Sealant (Z-Flex)	<b>240006910</b>	<b>\$594</b>
<b>Kit #40LKT420 BCL/BFL</b> 20' X 4" Flex Vent, Terminal Adaptor & Sealant (Z-Flex)	<b>240006911</b>	<b>\$737</b>
<b>Concentric Intake/Vent Terminal BCL/BFL</b>	<b>28972</b>	<b>\$549</b>
<b>Riser Type Intake/Vent Terminal BCL/BFL</b>	<b>29231</b>	<b>\$1,269</b>

**BCL/BCL-S/BFL STANDARD EQUIPMENT**


**STANDARD EQUIPMENT:**


Heat Exchanger – Proven heat exchanger design featuring 100% welded construction for maximum performance. Large accessible clean out ports.  
 Radiator – “Wrap-around” style for maximum heat transfer.  
 Cabinet construction – 22 gauge steel cabinet ensures strength and quiet operation. Access door easily removed for easy access to enclosed burner and controls.  
 Insulation – Spun glass and aluminum foil for “hand-cool” cabinet.  
 Burner – Equipped with industry leading Beckett or Riello oil burners which include oil solenoid valve, PSC motor and solid state controls. Factory assembled, wired and tested. Ready to connect to fuel line.  
 Barometric Draft Control – Included with all chimney vent models.  
 Blower – Direct drive or belt drive type. Permanently lubricated, resilient mounted.  
 PSC Blower Motor – Designed for heavy duty continuous operation. Thermally protected. Four-speed is standard with ½ HP direct drive models. Three-speed is standard with 1 HP direct drive models. Single speed with adjustable motor pulley is standard with belt drive models.  
 Blower Assembly – Entire unit can be easily removed for servicing.  
 Controls – (Honeywell) fan and limit control is standard on all models.  
 Air conditioning – Prewired fan center relay is standard on all direct drive models.  
 Filter Racks and Washable Air Filters – Included with all models.  
 Alternate firing rates to fit a wide variety of applications (alternate nozzles are field supplied).  
 Direct Vent Models – Include Beckett AFII-150 oil burner with pressure switch system for proving airflow, intake air collar and vent adaptor. Vent pipe kits sold separately.

Vent to Appliance adapter included (BCL PN 240006905, BFL PN 240006903)

**BML/BMLV SERIES B**  
LOWBOY OIL FURNACES





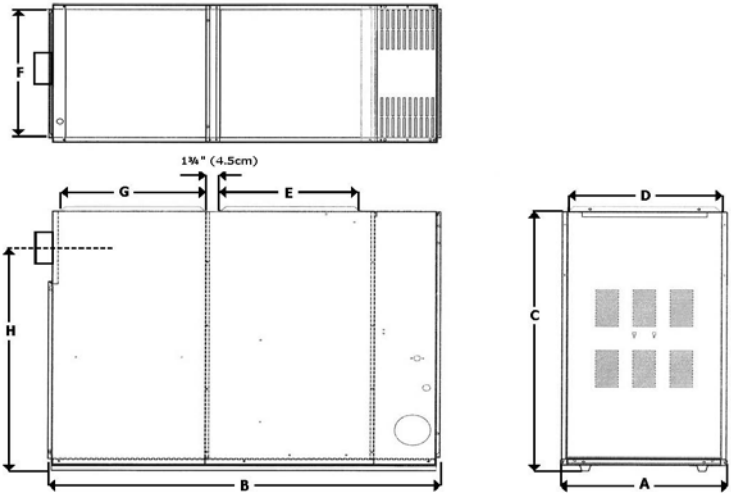

General Information (See IOM for complete instructions)								
Clearances	Clearance to Combustibles BML and BMLV							
(1) Required distances measured from furnace.	Top	1"						
	Bottom	0"						
	S/A Plenum	1"						
	Rear	6"						
	Sides	1"						
	Front	1"						
	Flue Pipe	4" measured horizontally or below flue pipe. 8" measured vertically or above flue pipe.						
Enclosure	Closet							
*18" Required for one side for access to rear.								
**24" Service Clearance.								
All models may be installed on combustible floors.								
Electrical	(115 Volts AC, 60 hertz, 1 phase, 12 Amps)							
Dimensions								
Model	Cabinet			Plenum Openings		Flue		Filter (Permanent)
	Width A	Length B	Height C	Supply D x E	Return F x G	Diameter H	Height J	
BML/BMLV	22"	51-1/2"	32"	20-1/2" x 19"	20-1/2" x 18-1/2"	5"	26-1/4"	20" x 20" x 1"

BML/BMLV LOWBOY SERIES CONTINUED										
BML/BMLV - LOWBOY - REAR FLUE										
MODEL	SKU	TRADE PRICE	FIR. RATE GPH	INPUT/ OUTPUT MBH	AFUE	VENT	BURNER	MOTOR DRIVE	AC RANGE IN TONS	SHIP WGT. (LBS.)
BML80B2	32308075	\$2,560	0.65	91/76	84.0%	CHIM.	BECKETT AF	1/2 HP BELT	2 - 3.5 TONS (700-1400)	240
BML80B2	32308070	\$2,457						1/2 HP DIRECT		
BMLV80B2	32308076	\$3,253						1/2 HP ECM		
BML80BRF2	32308073	\$2,734	0.65	91/77	85.4%	CHIM.	RIELLO 40F3	1/2 HP DIRECT		240
BMLV80BRF2	32308078	\$3,434					1/2 HP ECM			
BML80BB2U2	32308072C	\$3,221	0.65	91/76	84.3%	DIR.*	BECKETT AFII-85	1/2 HP DIRECT		240
BMLV80BB2U2	32308077C	\$3,795					1/2 HP ECM			
BML80BRBU2	32308074C	\$4,153	0.65	91/78	86.1%	DIR.*	RIELLO 40BF3	1/2 HP DIRECT		240
BMLV80BRBU2	32308079C	\$4,029					1/2 HP ECM			

\* Direct Vent units require the use of Olsen/Airco specific Vent Kit and Termination.

USE FURNACE MULTIPLIER FOR ALL OF THE FOLLOWING	PN	TRADE
<b>Kit #40LKT310 BML</b> 10' x 3" Flex Vent, Terminal Adaptor & Sealant (Z-Flex)	240006906	\$412
<b>Kit #40LKT315 BML</b> 15' X 3" Flex Vent, Terminal Adaptor & Sealant (Z-Flex)	240006907	\$537
<b>Kit #40LKT320 BML</b> 20' X 3" Flex Vent, Terminal Adaptor & Sealant (Z-Flex)	240006908	\$673
<b>Conversion Kit to BML 90 &amp; 100</b>	36000069	\$44
<b>Low Fire Kit (.50GPH) BML</b>	29880	\$62
<b>Concentric Intake/Vent Terminal BML</b>	28972	\$549
<b>Riser Type Intake/Vent Terminal BML</b>	29231	\$1,269

**BML/BMLV STANDARD EQUIPMENT**

**STANDARD EQUIPMENT:**

Heat Exchanger – Proven heat exchanger design featuring 100% welded construction for maximum performance. Large accessible clean out ports.  
 Radiator – “Wrap-around” style for maximum heat transfer.  
 Cabinet construction – 22 gauge steel cabinet ensures strength and quiet operation. Access door easily removed for easy access to enclosed burner and controls.  
 Insulation – Spun glass and aluminum foil for “hand-cool” cabinet.  
 Burner – Equipped with industry leading Beckett or Riello oil burners which include oil solenoid valve, PSC motor and solid state controls. Factory assembled, wired and tested. Ready to connect to fuel line.  
 Barometric Draft Control – Included with all chimney vent models.  
 Blower – Direct drive or belt drive type. Permanently lubricated, resilient mounted.  
 PSC Blower Motor (BML Models) – Designed for heavy duty continuous operation. Thermally protected. Four-speed is standard with ½ HP direct drive models. Single speed with adjustable motor pulley is standard with belt drive models.  
 ECM Variable Speed Blower Motor (BMLV Models) – Maximizes air conditioner efficiencies, reduces electrical operating costs and enhances comfort with programmed ramp up and ramp down operation. Available on ½ HP direct drive models.  
 Blower Assembly – Entire unit can be easily removed for servicing.  
 Controls – (UTE) Electronic fan timer control is standard on all models.  
 Air conditioning – Fan timer control is AC ready.  
 Filter Racks and Washable Air Filters – Included with all models.  
 Alternate firing rates available for a wide variety of applications (alternate nozzles are field supplied).  
 Direct Vent Models – Include Beckett AFII-85 or Riello 40BF3 oil burner with pressure switch system for proving airflow, intake air collar and vent adapter. Vent pipe kits sold separately.  
 Vent to Appliance adapter included (BFL PN 240006903, BML PN 240006904)

**HML/HMLV SERIES C**  
HIGHBOY OIL FURNACES



Clearances			Clearance to Combustibles HML and HMLV				
(1) Required distances measured from furnace.	Top	1"					
	Bottom	0"					
	S/A Plenum	1"					
	Rear	1"					
	Sides	1"					
	Front	1"*					
	Flue Pipe	18"					
	Enclosure	Closet					
*24" Service Clearance.							
All models may be installed on combustible floors.							
Electrical		(120 Volts AC, 60 hertz, 1 phase, 12 Amps)					
Dimensions							
Model	Cabinet			Supply	Plenum Openings	Flue Diam. J	Filter (Permanent)
	Width A	Length B	Height C				
	Return Side/Bottom						
HML/HMLV	22"	30-3/4"	49-5/8"	20-1/2"W x 20"D	14" x 22"	5"	16" x 25" x 1"

HML/HMLV HIGHBOY SERIES CONTINUED										
HML/HMLV - HIGHBOY - FRONT FLUE										
MODEL	SKU	TRADE PRICE	FIR. RATE GPH	INPUT/ OUTPUT MBH	AFUE	VENT	BURNER	MOTOR DRIVE	AC RANGE IN TONS	SHIP WGT. (LBS.)
HML80C2	31308070	\$2,444	0.65	91/76	83.3%	CHIM.	BECKETT AF	1/2 HP DIRECT	2 - 3.5 TONS (690 - 1500)	250
HMLV80C2	31308076	\$3,109						1/2 HP ECM		
HML80CNX2	31308085	\$2,565	0.65	91/76	85.7%	CHIM.	BECKETT NX	1/2 HP DIRECT		250
HMLV80CNX2	31308090	\$3,218						1/2 HP ECM		
HML80CRF2	31308073	\$2,706	0.65	91/77	85.2%	CHIM.	RIELLO 40F3	1/2 HP DIRECT		250
HMLV80CRF2	31308078	\$3,323						1/2 HP ECM		
HML80CB2U2	31308072C	\$3,288	0.65	91/77	83.9%	DIR.*	BECKETT AFII-85	1/2 HP DIRECT		250
HMLV80CB2U2	31308077C	\$3,955						1/2 HP ECM		
HML80CRBU2	31308074C	\$3,619	0.65	91/77	85.4%	DIR.*	RIELLO 40BF3	1/2 HP DIRECT		250
HMLV80CRBU2	31308079C	\$4,285						1/2 HP ECM		

\* Direct Vent units require the use of Olsen/Airco specific Vent Kit and Termination.

USE FURNACE MULTIPLIER FOR ALL OF THE FOLLOWING	PN	TRADE
<b>Kit #40LKT310 HML</b> 10' x 3" Flex Vent, Terminal Adaptor & Sealant (Z-Flex)	240006906	\$412
<b>Kit #40LKT315 HML</b> 15' X 3" Flex Vent, Terminal Adaptor & Sealant (Z-Flex)	240006907	\$537
<b>Kit #40LKT320 HML</b> 20' X 3" Flex Vent, Terminal Adaptor & Sealant (Z-Flex)	240006908	\$673
<b>Conversion Kit to HML 90 &amp; 100</b>	36000069	\$44
<b>Low Fire Kit (.50GPH) HML</b>	29880	\$62
<b>Concentric Intake/Vent Terminal HML</b>	28972	\$549
<b>Riser Type Intake/Vent Terminal HML</b>	29231	\$1,269

**HML/HMLV HIGHBOY SERIES CONTINUED**

**HML/HMLV STANDARD EQUIPMENT**

**STANDARD EQUIPMENT:**


Heat Exchanger – Proven heat exchanger design featuring 100% welded construction for maximum performance. Large accessible clean out ports.  
 Radiator – “Wrap-around” style for maximum heat transfer.  
 Cabinet construction – 22 gauge steel cabinet ensures strength and quiet operation. Access door easily removed for easy access to enclosed burner and controls.  
 Insulation – Spun glass and aluminum foil for “hand-cool” cabinet.  
 Burner – Equipped with industry leading Beckett or Riello oil burners which include oil solenoid valve, PSC motor and solid state controls. Factory assembled, wired and tested. Ready to connect to fuel line.  
 Barometric Draft Control – Included with all chimney vent models.  
 Blower – Direct drive type. Permanently lubricated, resilient mounted.  
 PSC Blower Motor (HML/HTL Models) – Designed for heavy duty continuous operation. Thermally protected. Four-speed is standard with ½ HP direct drive models.  
 ECM Variable Speed Blower Motor (HMLV/HTLV Models) – Maximizes air conditioner efficiencies, reduces electrical operating costs and enhances comfort with programmed ramp up and ramp down operation. Available on ½ HP direct drive models.  
 Blower Assembly – Full length slide out blower tray allows entire blower assembly to be easily removed for servicing.  
 Controls – (UTE) Electronic fan timer control is standard on all models.  
 Air conditioning – Fan timer control is AC ready.  
 Filter Racks and Washable Air Filters – Included with all models.  
 Alternate firing rates available for a wide variety of applications (alternate nozzles are field supplied).  
 Direct Vent Models – Include Beckett AFII-85 or Riello 40BF3 oil burner with pressure switch system for proving airflow, intake air collar and vent adapter. Vent pipe kits sold separately.


Vent to Appliance adapter included (HML PN 240006902)



**HTL/HTLV SERIES D**  
HIGHBOY OIL FURNACES





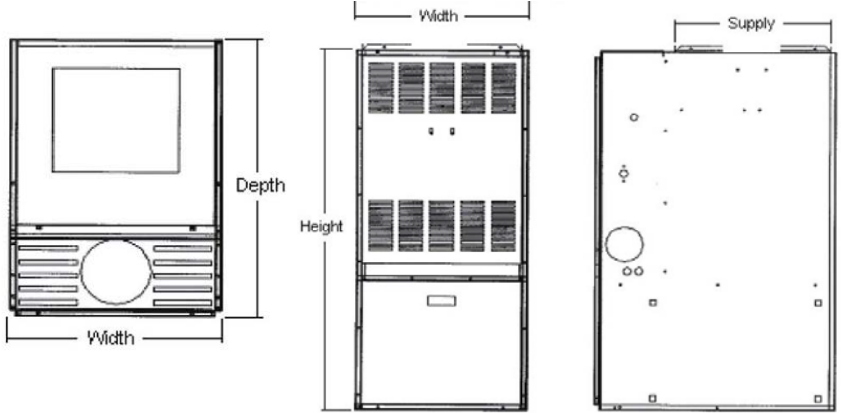

General Information (See IOM for complete instructions)							
Clearances	Clearance to Combustibles HTL and HTLV						
(1) Required distances measured from furnace.	Top	1"					
	Bottom	0"					
	S/A Plenum	1"					
	Rear	1"					
	Sides	1"					
	Front	1"					
	Flue Pipe	18"					
	Enclosure	Closet					
*24" Service Clearance.							
All models may be installed on combustible floors.							
Electrical	(115 Volts AC, 60 hertz, 1 phase, 12 Amps)						
Dimensions							
Model	Cabinet			Plenum Openings	Flue Diam.	Filter (Permanent)	
	Width	Length	Height				
	A	B	C	Supply	Return	J	
					Side/		
					Bottom		
HTL/HTLV	22"	30-3/4"	58"	20-1/2"W x 20"D	14" x 22"	6"	16" x 25" x 1"

<b>HTL/HTLV HIGHBOY SERIES CONTINUED</b>										
<b>HTL/HTLV - HIGHBOY - FRONT FLUE</b>										
<b>MODEL</b>	<b>SKU</b>	<b>TRADE PRICE</b>	<b>FIR. RATE GPH</b>	<b>INPUT/ OUTPUT MBH</b>	<b>AFUE</b>	<b>VENT</b>	<b>BURNER</b>	<b>MOTOR DRIVE</b>	<b>AC RANGE IN TONS</b>	<b>SHIP WGT. (LBS.)</b>
HTL120D2	31312070	<b>\$2,697</b>	1.00	140/117	83.0%	CHIM.	BECKETT AF	1/2 HP DIRECT	2 - 3.5 TONS (650 - 1400)	270
HTL115DRF2	31311573	<b>\$2,931</b>	0.95	133/113	84.1%	CHIM.	RIELLO 40F3	1/2 HP DIRECT		
HTLV115DRF2	31311578	<b>\$3,887</b>						1/2 HP ECM		

<b>USE FURNACE MULTIPLIER FOR ALL OF THE FOLLOWING</b>	<b>PN</b>	<b>TRADE</b>
<b>Concentric Intake/Vent Terminal HTL</b>	<b>28972</b>	<b>\$549</b>
<b>Riser Type Intake/Vent Terminal HTL</b>	<b>29231</b>	<b>\$1,269</b>

**HTL/HTLV STANDARD EQUIPMENT**

**STANDARD EQUIPMENT:**

Heat Exchanger – Proven heat exchanger design featuring 100% welded construction for maximum performance. Large accessible clean out ports.  
 Radiator – “Wrap-around” style for maximum heat transfer.  
 Cabinet construction – 22 gauge steel cabinet ensures strength and quiet operation. Access door easily removed for easy access to enclosed burner and controls.  
 Insulation – Spun glass and aluminum foil for “hand-cool” cabinet.  
 Burner – Equipped with industry leading Beckett or Riello oil burners which include oil solenoid valve, PSC motor and solid state controls. Factory assembled, wired and tested. Ready to connect to fuel line.  
 Barometric Draft Control – Included with all chimney vent models.  
 Blower – Direct drive type. Permanently lubricated, resilient mounted.  
 PSC Blower Motor (HML/HTL Models) – Designed for heavy duty continuous operation. Thermally protected. Four-speed is standard with ½ HP direct drive models.  
 ECM Variable Speed Blower Motor (HMLV/HTLV Models) – Maximizes air conditioner efficiencies, reduces electrical operating costs and enhances comfort with programmed ramp up and ramp down operation. Available on ½ HP direct drive models.  
 Blower Assembly – Full length slide out blower tray allows entire blower assembly to be easily removed for servicing.  
 Controls – (UTEC) Electronic fan timer control is standard on all models.  
 Air conditioning – Fan timer control is AC ready.  
 Filter Racks and Washable Air Filters – Included with all models.  
 Alternate firing rates available for a wide variety of applications (alternate nozzles are field supplied).  
 Direct Vent Models – Include Beckett AFII-85 or Riello 40BF3 oil burner with pressure switch system for proving airflow, intake air collar and vent adapter. Vent pipe kits sold separately.

<b>R410A 13 SEER Condensing Units</b>				
<b>PART NO.</b>	<b>DESCRIPTION</b>	<b>SHIP WEIGHT</b>	<b>TRADE PRICE</b>	
GSX130181-OL	1.5 Ton Condensing Unit	178	<b>\$1,377</b>	
GSX130241-OL	2.0 Ton Condensing Unit	178	<b>\$1,459</b>	
GSX130301-OL	2.5 Ton Condensing Unit	180	<b>\$1,530</b>	
GSX130361-OL	3.0 Ton Condensing Unit	197	<b>\$1,658</b>	
GSX130421-OL	3.5 Ton Condensing Unit	219	<b>\$1,939</b>	
GSX130481-OL	4.0 Ton Condensing Unit	225	<b>\$2,094</b>	
GSX130601-OL	5.0 Ton Condensing Unit	240	<b>\$2,499</b>	
<b>CC Series Cased "A" Coils Upflow/Downflow</b>				
<b>PART NO.</b>	<b>CAPACITY</b>	<b>CASE WIDTH (IN.)</b>	<b>PAN TYPE</b>	<b>TRADE PRICE</b>
CC24A3G-220R-066	1.5 & 2 Ton	22	Painted Galvanized	<b>\$440</b>
CC30C3G-220R-066	2.5 Ton	22		<b>\$526</b>
CC36B3G-220R-066	3 Ton	20		<b>\$524</b>
CC42C3G-220R-066	3.5 Ton	22		<b>\$578</b>
CC48B3G-220R-066	4 Ton	22		<b>\$576</b>
CC60D3G-260R-066	5 Ton	26		<b>\$670</b>
CC60D3G-220R-066	5 Ton	22		<b>\$670</b>
<b>CE Series Cased "A" Coils Multi-Position</b>				
<b>PART NO.</b>	<b>CAPACITY</b>	<b>CASE WIDTH (IN.)</b>	<b>PAN TYPE</b>	<b>TRADE PRICE</b>
CE24A3G-220R-056	1.5 & 2 Ton	22	Painted Galvanized	<b>\$511</b>
CE30C3G-220R-056	2.5 Ton	22	Painted Galvanized	<b>\$592</b>
CE36B3G-220R-056	3 ton	20.5	Painted Galvanized	<b>\$590</b>

GSX13018-601 R-410A Condenser - Coil Matrix

Oil Furnaces	GSX13018-241	GSX130301	GSX130361	GSX130421	GSX130481	GSX130601
Models	Coil Model	Coil Model	Coil Model	Coil Model	Coil Model	Coil Model
MPL-B	CE24A3G-220R-056	CE30C3G-220R-056	CE36B3G-220R-056	N/A	N/A	N/A
WML/V-C	CE24A3G-220R-056	CE30C3G-220R-056	CE36B3G-220R-056	N/A	N/A	N/A
BCL-190/225	N/A	N/A	N/A	No Match Deep Enough	No Match Deep Enough	CC60D3G-260R-066
BML/V-B	CC24A3G-220R-066	CC30C3G-220R-066	CC36B3G-220R-066	N/A	N/A	N/A
BCL	CC24A3G-220R-066	CC30C3G-220R-066	CC36B3G-220R-066	CC42C3G-220R-066	CC48B3G-220R-066	CC60D3G-260R-066
BFL	CC24A3G-220R-066	CC30C3G-220R-066	CC36B3G-220R-066	CC42C3G-220R-066	CC48B3G-220R-066	CC60D3G-260R-066
HML/V-C	CC24A3G-220R-066	CC30C3G-220R-066	CC36B3G-220R-066	CC42C3G-220R-066	N/A	N/A
HTL/V-D	CC24A3G-220R-066	CC30C3G-220R-066	CC36B3G-220R-066	N/A	CC48B3G-220R-066	CC60D3G-260R-066

CA, CB, CC, CD, CE, CP, CM Series Coils

C	A	24	A3	F	-145	L	-001
C Series Configuration A = uncased up/down B = cased dedicated horizontal LaborSaver C = cased up/down D = full depth cased downflow E = cased multi-position VersaCoil P = cased dedicated horizontal with attached plenum M = manufactured home coil Nominal tonnage (MBTUH) Coil descriptor code (face area, rows, fpi)				Refrigerant and plumbing connections L = left-hand plumbing and refrigerant connections R = right-hand plumbing and refrigerant connections T = refrigerant out the top, plumbing out opposite sides CA, CM Series: Drain pan width code CB, CC, CD, CE, CP Series: Furnace width code Metering device F = R-22 Flo-rater G = R-410A Flo-rater B = 20% bleed A/C or H/P R22 TXV X = non-bleed A/C or H/P R22 TXV 4 = non-bleed A/C or H/P R410 TXV			

OPTION CODES:

- 014 - Same as standard except: Double condensate drain, flanged top duct opening.
- 056 - Same as standard except: Powder coated galvanized metal drain pan with double drain; flanged top duct opening. For use with all oil furnaces.
- 066 - Same as standard except: Powder coated galvanized metal drain pan with double drain; flanged top duct opening. For use with all oil furnaces.